


84" OR 96" FLAT SLAB TOP

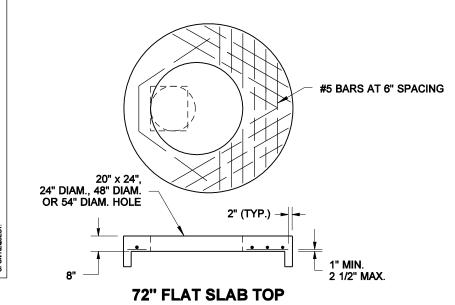

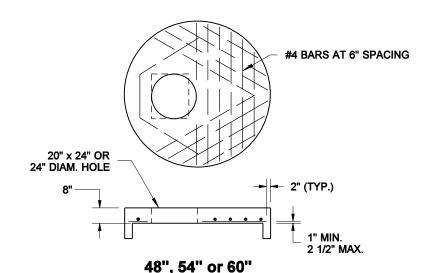

FLAT SLAB TOP


TYPICAL ORIENTATION FOR ACCESS AND STEPS




ECCENTRIC CONE SECTION


NOTE

As an acceptable alternate to rebar, wire mesh having a minimum area of 0.12 square inches per foot may be used for adjustment sections.






12" (TYP.)

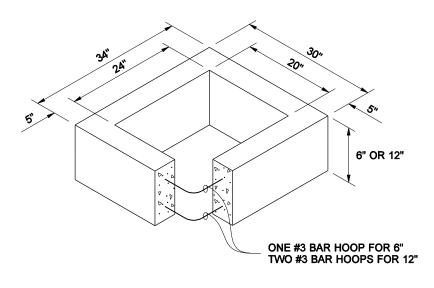

PREFABRICATED LADDER

RECTANGULAR ADJUSTMENT SECTION



CIRCULAR ADJUSTMENT SECTION



MISCELLANEOUS DETAILS FOR MANHOLES AND CATCH BASINS STANDARD PLAN B-1z

SHEET 1 OF 1 SHEET

APPROVED FOR PUBLICATION

Harold J. Peterfeso 06-23-04



4/04 ADDED 84" FLAT SLAB TOP AMC
DATE REVISION BY